

TEST REPORT

**APPLICANT** : RESPILON PRODUCTION S.R.O**REPORT NO.** : M271-22-01817**SAMPLE RECEIVED DATE** : 2022-03-31**REPORT ISSUED DATE** : 2022-04-08**PAGE** : 1 OF 2**SAMPLE DESCRIPTION** : One(1) sample

=====

SAMPLE NAME SUBMITTED BY THE APPLICANT : RWM 6.1

=====

TEST CONDUCTED : As requested by the applicant, for details please see attached page(s).

=====

PREPARED AND CHECKED BY
FOR FITISEONG-KEUN JANG
QUALITY MANAGERAUTHORIZED BY
FOR FITIHWA-YOUNG KIM
PRESIDENT

※ Report Verification No.: NSAN-R3DA-WPH1 ※

(You can see the authenticity of your test report through the above "Report Verification No." at FITI homepage.)

e-DOCUMENT SERVICE

The test results contained in this report are limited to results on the sample(s) that is provided by client and are not necessarily indicative or representative of the qualities of the lot from which the sample(s) was taken or of all products. Results contained in this report are not based on the quality certification of sample by the FITI quality certification program unless specifically requested by the client. Further use of the results of this report is prohibited unless allowed under a separate agreement set forth in an official document that is established between the client identified on this letter and the FITI. This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation.

Only the original report (including reissue) is valid. The test report received via e-mail(including its copy and the file) is an e-document for reference of test results and is NOT the official Document.

REPORT NO.: M271-22-01817
PAGE : 2 OF 2

01. FLAMMABILITY (ISO 6941 : 2003)

#1

	LENGTH (s)			WIDTH (s)			AVERAGE (s)
	1	2	3	1	2	3	
FROM THE START OF THE APPLICATION OF THE TEST FLAME UNTIL THE SEVERANCE OF THE LOWER(FIRST) MAKER THREAD (220 mm)	NIL	NIL	NIL	NIL	NIL	NIL	-
FROM THE START OF THE APPLICATION OF THE TEST FLAME UNTIL THE SEVERANCE OF THE MIDDLE(SECOND) MAKER THREAD (370 mm)	NIL	NIL	NIL	NIL	NIL	NIL	-
FROM THE START OF THE APPLICATION OF THE TEST FLAME UNTIL THE SEVERANCE OF THE UPPER(THIRD) MAKER THREAD (520 mm)	NIL	NIL	NIL	NIL	NIL	NIL	-


NOTE) TEST METHOD : PROCEDURE A (SURFACE IGNITION)

FLAME APPLICATION TIME : 10 s

NIL : NO SEVERANCE OF THE MAKER THREAD

** End of The Report **

- SAMPLE PHOTO -

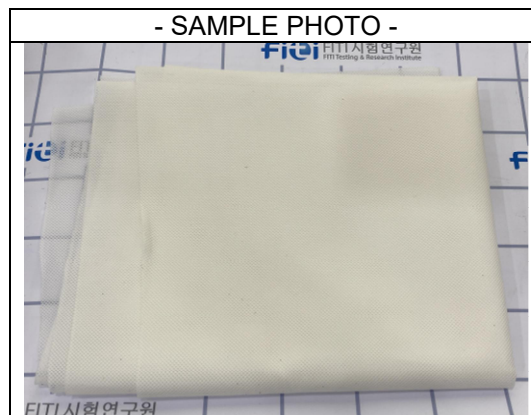

e-DOCUMENT SERVICE

The test results contained in this report are limited to results on the sample(s) that is provided by client and are not necessarily indicative or representative of the qualities of the lot from which the sample(s) was taken or of all products. Results contained in this report are not based on the quality certification of sample by the FITI quality certification program unless specifically requested by the client. Further use of the results of this report is prohibited unless allowed under a separate agreement set forth in an official document that is established between the client identified on this letter and the FITI. This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation. Only the original report (including reissue) is valid. The test report received via e-mail(including its copy and the file) is an e-document for reference of test results and is NOT the official Document.